

Platný od: **16.05.2022**


Ceník tříložkových komínů pro plynná paliva BEMAL





Ceny bez DPH 21%.


Materiál: vnitřní vložka a plášť AI 99,5 tl. 0,6mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahřížecí díl s víčkem	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech 45°
110/190	578	622	462	153	363	565	137	495	137	107	610
120/200	608	664	492	159	377	578	147	512	147	110	621
130/210	629	699	518	170	390	619	150	528	150	116	631
140/220	662	741	547	174	414	642	160	543	160	118	642
150/230	697	776	583	183	452	681	170	550	170	121	652

 Použitá izolace má objemovou hmotnost 100 kg/m³.

Konzole a spony

Průměr	Fe - Komaxit				Spona (+hmož.)
	Konzole nosná		Konzole		
	0 - 20 cm	20 - 50cm	0 - 20 cm	20 - 50 cm	
					
130	628	861	588	718	214
140	651	898	608	745	214
150	674	926	628	765	214
160	697	938	651	789	238
180	741	978	697	827	238
190	765	1002	718	845	238
200	789	1024	741	877	247
210	810	1045	745	883	247
220	827	1075	751	895	254
230	845	1090	757	903	267
240	877	1113	760	909	298
250	919	1134	765	919	305
260	933	1157	775	923	311
270	940	1168	779	926	330
280	944	1180	781	929	344
290	952	1192	785	931	354
300	966	1202	789	933	364
310	972	1208	795	942	374
320	978	1214	799	948	382
330	982	1219	805	957	388
350	990	1225	810	966	404

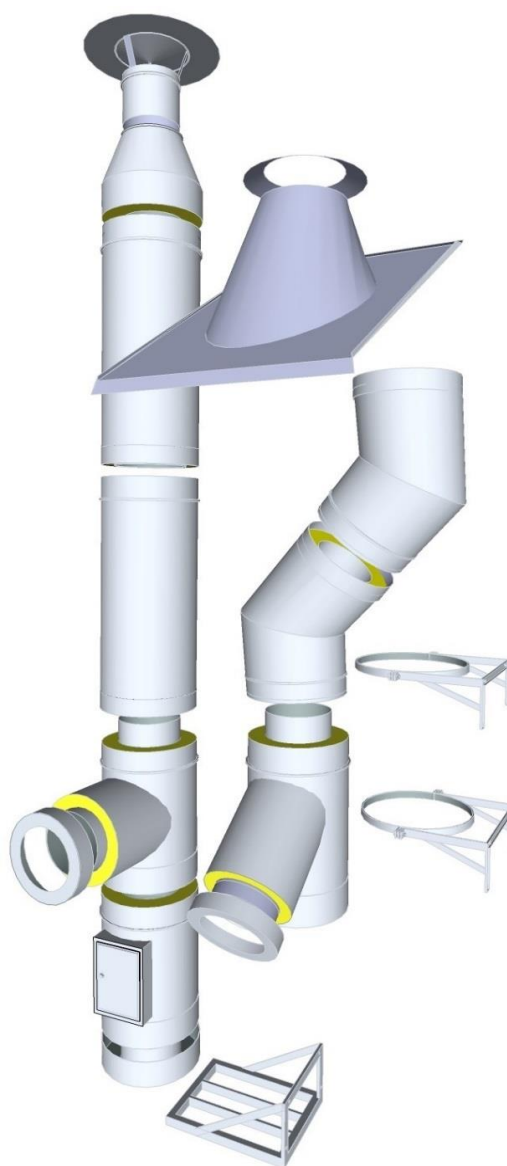

Nerezové konzole viz. Katalog

Platný od: 16.05.2022

Ceník tříložkových kominů pro plynná paliva

Výrobce : Bémáci s.r.o.

Certifikát: č.1020-CPD-010026245



Ceny bez DPH 21%.

Materiál: vnitřní vložka Ak ČSN EN 1.4301 tl. 0,5mm, plášť Al 99,5 tl. 0,6mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahlížecí díl víčko	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech Al 45°
110/190	773	897	780	194	418	649	137	569	137	246	610
120/200	814	949	825	204	437	673	147	582	147	253	621
130/210	845	991	862	215	463	721	150	596	150	260	631
140/220	887	1026	892	229	502	787	160	609	160	267	642
150/230	933	1076	936	251	537	839	170	619	170	274	652
160/240	971	1124	977	262	565	881	176	640	176	278	
170/250	1012	1205	1048	265	696	933	259	662	259	285	
180/260	1055	1272	1106	281	747	983	276	685	276	298	
190/270	1098	1363	1185	293	782	1044	283	721	283	304	
200/280	1143	1459	1269	303	825	1109	290	743	290	309	
210/290	1191	1535	1335	316	872	1168	302	766	302	318	
220/300	1238	1570	1365	328	912	1230	315	787	315	326	
230/310	1282	1649	1434	342	957	1300	333	809	333	358	
240/320	1326	1734	1508	361	998	1372	351	831	351	366	
250/330	1372	1802	1567	375	1041	1440	370	853	370	378	
300/380	1759	2358	2050	488	1088	1781	453	961	453	468	

Materiál: vnitřní vložka Ak ČSN EN 1.4301 tl. 0,5mm, plášť Ak EN 1.4301 0,5mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahlížecí díl víčko	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech Ak
110/190	1087	1220	1061	194	557	928	209	688	209	246	1142
120/200	1137	1283	1116	204	581	939	218	711	218	253	1164
130/210	1187	1349	1173	215	608	997	230	740	230	260	1208
140/220	1267	1426	1240	229	640	1052	245	768	245	267	1213
150/230	1291	1500	1304	251	685	1121	264	800	264	274	1216
160/240	1339	1586	1379	262	737	1210	272	828	272	278	1240
170/250	1398	1678	1459	265	790	1298	288	849	288	285	1262
180/260	1453	1772	1541	281	840	1387	294	877	294	298	1282
190/270	1511	1881	1636	293	906	1464	298	904	298	304	1321
200/280	1569	1988	1729	303	920	1541	302	931	302	309	1483
210/290	1629	2112	1837	316	1005	1612	320	959	320	318	
220/300	1689	2226	1936	328	1052	1717	347	986	347	326	1631
230/310	1746	2340	2035	342	1119	1827	355	1014	355	358	
240/320	1806	2470	2148	361	1173	1926	363	1043	363	366	1862
250/330	1863	2588	2250	375	1233	2025	368	1074	368	378	
300/380	2170	3295	2865	488	1525	2514		1233		468	2353

 Použitá izolace má objemovou hmotnost 100 kg/m³.