



Ceník tříložkových komínů pro plynná paliva BEMAL

Ceny bez DPH 21%.


Materiál: vnitřní vložka a plášť AI 99,5 tl. 0,6mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahlížecí díel s víčkem	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech 45°
110/190	751	808	601	153	472	735	137	495	137	107	610
120/200	790	863	640	159	490	751	147	512	147	110	621
130/210	818	909	673	170	507	805	150	528	150	116	631
140/220	861	963	711	174	538	835	160	543	160	118	642
150/230	906	1009	758	183	588	885	170	550	170	121	652

 Použitá izolace má objemovou hmotnost 100 kg/m³.

Konzole a spony

Průměr	Fe - Komaxit				Spona (+hmož.)
	Konzole nosná		Konzole		
	0 - 20 cm	20 - 50cm	0 - 20 cm	20 - 50 cm	
130	628	861	588	718	214
140	651	898	608	745	214
150	674	926	628	765	214
160	697	938	651	789	238
180	741	978	697	827	238
190	765	1002	718	845	238
200	789	1024	741	877	247
210	810	1045	745	883	247
220	827	1075	751	895	254
230	845	1090	757	903	267
240	877	1113	760	909	298
250	919	1134	765	919	305
260	933	1157	775	923	311
270	940	1168	779	926	330
280	944	1180	781	929	344
290	952	1192	785	931	354
300	966	1202	789	933	364
310	972	1208	795	942	374
320	978	1214	799	948	382
330	982	1219	805	957	388
350	990	1225	810	966	404

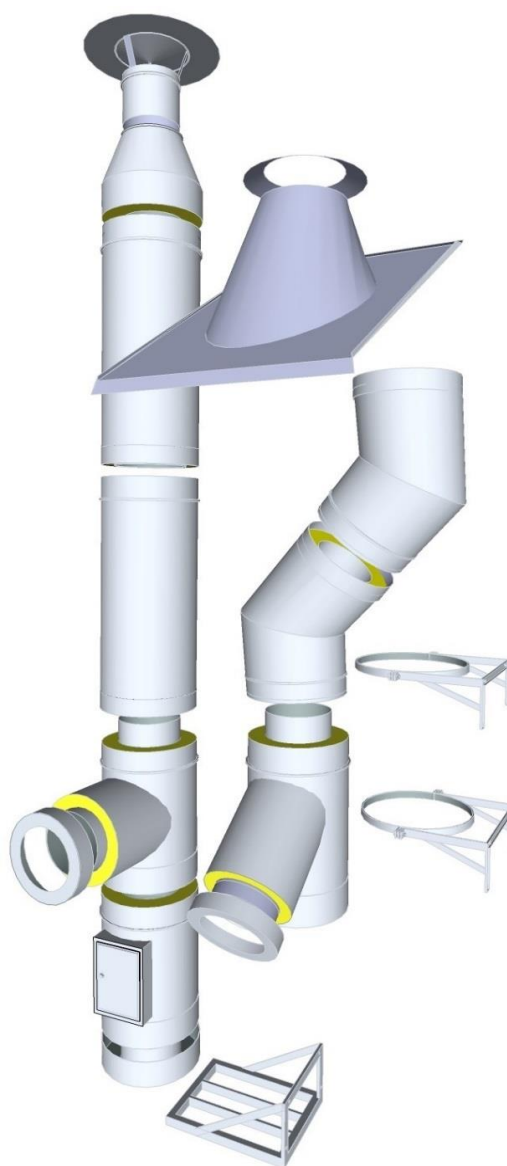

Nerezové konzole viz. Katalog

Platný od: 02.05.2023

Ceník tříložkových kominů pro plynná paliva

Výrobce : Bémáci s.r.o.

Certifikát: č.1020-CPD-010026245



Ceny bez DPH 21%.

Materiál: vnitřní vložka Ak ČSN EN 1.4301 tl. 0,5mm, plášť Al 99,5 tl. 0,6mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahlížecí díl víčko	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech Al 45°
110/190	1 005	1166	1014	194	543	844	137	569	137	246	610
120/200	1 058	1234	1073	204	568	875	147	582	147	253	621
130/210	1 099	1288	1121	215	602	937	150	596	150	260	631
140/220	1 153	1334	1160	229	653	1023	160	609	160	267	642
150/230	1 213	1399	1217	251	698	1091	170	619	170	274	652
160/240	1 262	1461	1270	262	735	1145	176	640	176	278	
170/250	1 316	1567	1362	265	905	1213	259	662	259	285	
180/260	1 372	1654	1438	281	1121	1278	276	685	276	298	
190/270	1 427	1772	1541	293	1017	1357	283	721	283	304	
200/280	1 486	1897	1650	303	1073	1442	290	743	290	309	
210/290	1 548	1996	1736	316	1134	1518	302	766	302	318	
220/300	1 609	2041	1775	328	1186	1599	315	787	315	326	
230/310	1 667	2144	1864	342	1244	1690	333	809	333	358	
240/320	1 724	2254	1960	361	1297	1784	351	831	351	366	
250/330	1 784	2343	2037	375	1353	1872	370	853	370	378	
300/380	2 287	3065	2665	488	1414	2315	453	961	453	468	

Materiál: vnitřní vložka Ak ČSN EN 1.4301 tl. 0,5mm, plášť Ak EN 1.4301 0,5mm

Průměr vnitř./vnějš.	Roura 1m	T kus 90°	Nahlížecí díl víčko	Odkap jednoduchý	Koleno 45°	Koleno 90°	Horní uslepení	Horní usl. kónické	Dolní uslepení	Mei. hlavice	Kr. plech Ak
110/190	1413	1586	1379	194	724	1206	209	688	209	246	1142
120/200	1478	1668	1451	204	755	1221	218	711	218	253	1164
130/210	1543	1754	1525	215	790	1296	230	740	230	260	1208
140/220	1647	1854	1612	229	832	1368	245	768	245	267	1213
150/230	1678	1950	1695	251	891	1457	264	800	264	274	1216
160/240	1741	2062	1793	262	958	1573	272	828	272	278	1240
170/250	1817	2181	1897	265	1027	1687	288	849	288	285	1262
180/260	1889	2304	2003	281	1092	1803	294	877	294	298	1282
190/270	1964	2445	2127	293	1178	1903	298	904	298	304	1321
200/280	2040	2584	2248	303	1196	2003	302	931	302	309	1483
210/290	2118	2746	2388	316	1307	2096	320	959	320	318	
220/300	2196	2894	2517	328	1368	2321	347	986	347	326	1631
230/310	2270	3042	2646	342	1455	2375	355	1014	355	358	
240/320	2348	3211	2792	361	1525	2504	363	1043	363	366	1862
250/330	2422	3364	2925	375	1603	2633	368	1074	368	378	
300/380	2821	4237	3725	488	1983	3268		1233		468	2353

 Použitá izolace má objemovou hmotnost 100 kg/m³.